

VESPER[®]

Bring back the warmth and hospitality of your favorite covered outdoor spaces with Vesper infrared heaters from Big Ass Fans. Featuring a premium aesthetic and zero light emission, Vesper offers distraction-free heating that's perfect for sunrooms, yoga studios, and patios.



KEY FEATURES

- ▶ **Sleek, low-profile design** integrates seamlessly into your space
- ▶ **Premium construction** provides years of worry-free operation
- ▶ **Zero light emissions** from unobtrusive infrared heating
- ▶ **Safe for semi-enclosed outdoor** and indoor rooms
- ▶ **Easy installation** with simple mounting brackets
- ▶ **LED on/off indicator** for added safety

OUTPUT

1,500 W
3,200 W

COVERAGE

UP TO
80 SQ FT
(7.4 SQ M)

VOLTAGE

120 V
240 V
208 V

WARRANTY

1 YEAR



BIG ASS FANS[®]


COMFORT WITHOUT
COMPROMISE

DISCOVER MORE ABOUT VESPER

Learn more at bigassfans.com/residential/heaters
or call **877.BIG.FANS** for a free custom quote.

VESPER[®]

HOME HEATING, SIMPLIFIED



Technical Specifications

Model	Output Wattage	Coverage ¹	Voltage	Current	Length	Width	Control	Environment ²	Mounting	Color
BAFDS15120B	1,500 W	Indoor: 49 sq ft (4.6 sq m) Covered Outdoor: 35 sq ft (3.3 sq m)	120 V	12.5 A	34 in. (864 mm)	8 in. (203 mm)	On/Off (Wall switch or thermostat)	Indoor or covered outdoor	Wall Mount Ceiling Mount	Black
BAFDS32240B	3,200 W	Indoor: 80 sq ft (7.4 sq m) Covered Outdoor: 48 sq ft (4.5 sq m)	240 V	13.3 A	68 in. (1727 mm)	8 in. (203 mm)				
BAFDS32080B	3,200 W	Indoor: 80 sq ft (7.4 sq m) Covered Outdoor: 48 sq ft (4.5 sq m)	208 V	15.4 A	68 in. (1727 mm)	8 in. (203 mm)				

Construction

Construction	Fuel Type	Heating Type ³	Electrical Installation	Certification
Solid extruded aluminum	Electric	No-light, convective infrared	Hardwired	cETLus (UL 2021/CSA 22.2)


Heating Coverage¹

Model	Width (A)	Depth (B)	Height (C)
BAFDS15120B	Indoor: 7 ft (2.1 m) Covered Outdoor: 5 ft (1.5 m)	Indoor: 7 ft (2.1 m) Covered Outdoor: 7 ft (2.1 m)	Indoor: 8 ft (2.4 m) Covered Outdoor: 8 ft (2.4 m)
BAFDS32240B BAFDS32080B	Indoor: 8 ft (2.4 m) Covered Outdoor: 6 ft (1.8 m)	Indoor: 10 ft (3 m) Covered Outdoor: 8 ft (2.4 m)	Indoor: 8 ft (2.4 m) Covered Outdoor: 8 ft (2.4 m)


Clearances⁴

Floor (USA)	Floor (Canada)	Overhead (Wall)	Overhead (Ceiling)	End	Side (Ceiling)	Clearance to Combustibles
6 ft 7 in. (2 m)	8 ft (2.4 m)	8 in. (203 mm)	4 in. (102 mm)	18 in. (457 mm)	24 in. (610 mm)	6 ft (1.8 m) front clearance Keep combustibles away from sides and rear


Heating Coverage



Wall Mount Clearances

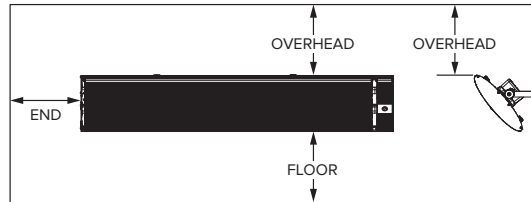

Ceiling Mount Clearances

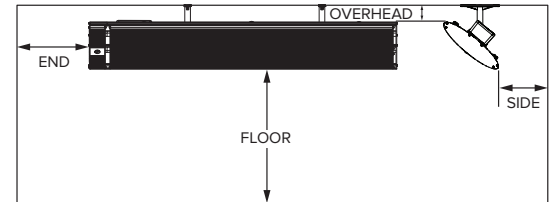

¹ Coverage area may be reduced in highly exposed areas.
² Heater not suitable for harsh environments.
³ Infrared heaters produce radiant heat that warms people and objects rather than the air around them.
⁴ Installer, specifier, or engineer should target 8 ft (2.4 m) mounting height to bottom of heater for optimal performance.

Lead times may vary.
See full warranty for coverage information.



USA
BIGASSFANS.COM
877-244-3267

CANADA
BIGASSFANS.COM
844-924-4277

AUSTRALIA
BIGASSFANS.COM/AU
1300 244 277

SINGAPORE
BIGASSFANS.COM/SG
65 6709 8500