



Ultra-Turf Tile



Ultra-Turf Tile features a dense, textured nylon wear layer molded to vulcanized composition rubber. While too abrasive to fall or dive on, this consistent and tight surface is ideal for all footwork drills and can be used with UltraTile. This 24-by-24-by-1-inch modular turf tile offers enhanced shock absorption against impact in moderate to extreme weight drop applications.

MARKETS

- Fitness
- Student Rec
- Sports

APPLICATIONS

- Functional Training
- Free Weights
- Therapy / Rehab
- Outdoor


BENEFITS


- Durable
- Sustainable
- Ease of maintenance
- Slip-resistant
- Easy installation with Quad Blok installation system


PRODUCT INFORMATION


Nominal Dimensions:

Available as a standard in molded tiles. Talk to your local agent to determine availability, pricing, minimums, and lead times.

 1" (25.4mm) x 24" (0.61m) x 24" (0.61m)

 ADA Ramp:
12" (30.5cm) x 48" (1.22m)
Thickness: 1" (25.4mm)

 Reducer:
4" (10.2cm) x 48" (1.22m)
Thickness: 1" (25.4mm)

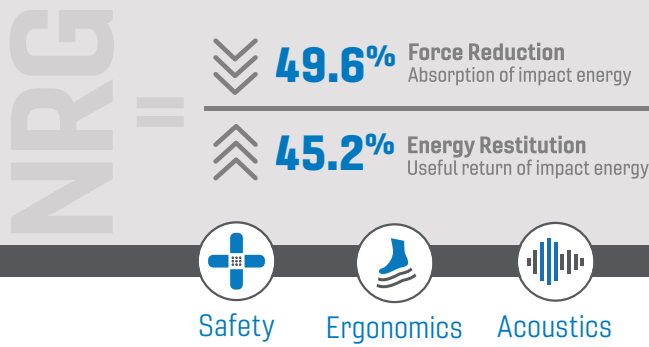
 Quad Blok:
1/2" H x 4 3/4" x 4 3/4"
Adhesive = 1 Tube / 15 Quad Bloks

For more information on these accessories [click here](#).

Color Options:

[Click here to view colors](#)

THE NRG FACTOR



TECHNICAL DETAILS

Performance Criteria	Test Standard	Typical Results
Lead Content	ASTM D2765	< 50 ppm
Total Yarn Linear Density	ASTM D1577	4,200 Denier
Yarn Breaking Strength	ASTM D2256	> 19 lbs
Yarn Melting Point	ASTM D7138	428°F
Flammability	ASTM D2859	Pass
Coefficient of Friction	ASTM C1028	0.78 Dry