Adding Your Aroma360 Oil

- Be certain the diffuser is unplugged or powered off before proceeding. Use the provided key to open the back door. Slide the door up and out to reveal the oil compartment. You'll notice a tube or nozzle hanging in the compartment.
- 2 Pour your oil into the provided aluminum bottle. Then, screw in the aluminum bottle until it is tightly secured so that the nozzle is in the bottle.
 - Do not overfill the bottle.
- Only Aroma360 oils should be used in the VanGogh360; using any other oils may damage the unit and will void the warranty.
- 3 Once the bottle of oil is inserted tightly and securely, reattach the door and lock with the same key. Note: If the bottle is not inserted tightly or straight, the oil will leak. Please double check that the bottle is inserted correctly. Once the oil is added, you may turn on or plug in the diffuser.
- 4 To remove the bottle from the unit, rotate the bottle counterclockwise until it comes loose.
- 5 When changing fragrance oils, remove any oils left in the bottle. (You may dispose of it or pour it back into the original bottle). Pour some rubbing alcohol into the aluminum bottle, about ¼ full. Diffuse the rubbing alcohol for about 15-30 minutes.
- 6 Remove any additional rubbing alcohol, rinse and dry the bottle as best as possible before pouring in the new fragrance oil.

Tips for Using Your VanGogh360

- The unit must always stay in its upright position. Tilting the diffuser with oil inside may cause damage to your unit.
- Always remove the oil when transporting the unit.
- If using the diffuser in a public space, we suggest using the lock feature for the control panel to prevent tampering with the settings.

There are three ways to use the VanGogh360. As a stand-alone unit, with the HVAC system or mounted to the wall.

HVAC Connection

- Remove the silver nozzle at the top of the unit by unscrewing it counterclockwise.
- 2 Replace it with the External HVAC Connector Nozzle (black part facing up) and screw it in clockwise and make sure it is tightly secured.
- 3 Using a screwdriver, make a scent point (a small hole) in the duct work that is between 0.5-1.5 feet after the air handler. The diameter of the scent point should be the same as the clear tube that was included with your Vangogh360+.
- 4 Insert one end of the clear tube into the External HVAC Connector Nozzle and the other end into the duct work. To remove the thick tubing from the diffuser, simply press down on the black outer portion of the tube connector and the tubing will release as the black outer ring is a "release" button. Be sure to cut any excess tubing. Seal the scent point with HVAC tape.
- 5 Make sure the silver button on the left of the LCD display is out (so that the fan is switched off).

6 Attach the power adapter into the unit and plug into a 110v outlet. Program the Vangogh360 to the desired settings and you're ready to start scenting! Tips:

Change the fan setting on your thermostat from "Auto" to "Always On".

Trim any excess clear tubing so that the HVAC tube is as short as possible. The shorter the tube, the more efficient the scent will be.

Stand-Alone Instructions

- 1 Place the unit in an open space with no furniture/fixtures covering or blocking the unit.
- 2 Switch the fan on (silver button to the left of the LCD display).
- 3 Ensure the silver silencer adapter is screwed in to the top of the unit (as opposed to the HVAC tubing connector.

TROUBLESHOOTING

PROBLEM	REASON			
No LCD Indication	Power is not getting to the unit or the unit is turned off.			
SOLUTION	Plug in the unit and press the silver button that is on the lower side part of the VanGogh360.			
No Mist/Scent	Make sure the unit is plugged in. Check the LCD display. If it says "OFF", the unit is not set to be working at that time. If the unit says "PAUSE" it's on the pause portion of the interval. Oil could be out.			
SOLUTION	Ensure the power is connected and adjust the event times and days so that the unit is set to "ON". Also check the oil canister to make sure			
	there is oil in the bottle.			
Low Mist/Scent	The nozzle may be clogged.			
SOLUTION	Run with rubbing alcohol for three minutes or change the nozzle.			
Oil Leakage	The VanGogh360 may be tilted. Your oil bottle may not be secure.			
_	Ensure the VanGogh360 is in a full and upright position.			
SOLUTION	Remove the fragrance bottle and reattach making sure it is screwed in straight and is very tight.			
Buttons are not working	The unit's settings may be locked.			
SOLUTION	Hold down the SET button for 10 seconds until you hear a beep. The sound will indicate "lock mode" has been disabled.			

AROMA360

THE ART $o \neq SCENT$

The VANGOGH360

Through the advanced technology of Cold-Air Diffusion, your discreet and sleek Aroma360 diffuser is a convenient and practical solution to enhance any space you desire.

	1		
(State		-	
	1		
			C C
			1
			=
			•
-			

At a Glance

POWER — The button to the right underneath the LCD screen is used to turn the VanGogh360 on and off.

FAN — The button to the left underneath the LCD screen controls the fan. Use the diffuser with the fan on to cover a larger area.

LOCK SETTINGS — If you want to lock the settings to prevent tampering, hold down the SET button for 20 seconds. This will prevent anyone from adjusting the settings on the unit. You will hear a beep that confirms the settings have been locked. Repeat to unlock the settings. You will need to unlock the unit to adjust the settings.

FACTORY RESET — If you want to reset the unit to factory settings, hold down the MODE button for 20 seconds and the unit will return to the following settings: 8a.m. – 10p.m., seven days a week.

 $\rm HVAC\ CONNECTION$ — Your VanGogh360 can also be used in conjunction with the central air conditioning system.

Understanding Your VanGogh360

The VanGogh360's LCD display provides valuable information about your settings. Here is a quick guide on what each item means.

WORK vs PAUSE — When the unit is in WORK mode, it is emitting aroma. When the unit is in PAUSE mode, it is not emitting aroma.

TIME — The number displayed on the unit should represent the current time, using the 24-hour clock.

DAY OF THE WEEK — The VanGogh360 allows you to have different settings for the days of the week. The day that's shown on the display should be the current day.

SCENT/WORK/PAUSE — This screen appears when adjusting the scenting strength.

What's included:

- The VanGogh360 Diffuser Unit
- 500 mL Aluminum Bottle
- 12V Power Cord
- HVAC Transparent Tubing
- Wall Mounting Brackets
- Spare Nozzle
- External HVAC Connector
- Two Small Keys


Setting Up Your VanGogh360

- 1 Unbox your new VanGogh360 and familiarize yourself with the parts and accessories.
- ² Insert the adapter in the VanGogh360's power source and plug the adapter into an outlet. Press the power button located on the left side of the diffuser to turn it on.

Now that the diffuser is powered on, you may begin adjusting the settings to your liking. By default, the LCD screen will depict the current time. Note the unit uses a 24-hour clock so 5:30p.m. will be shown as 17:30.

Setting the Current Time

- 1 To set the current time, press SET and the hour will flash. Press UP or DOWN to adjust to the current hour and press set to confirm your choice. (If your screen is unresponsive, press and hold the SET button for 20 seconds).
- 2 The minutes will now be flashing. Press UP or DOWN to adjust to the current minute and press SET to confirm your choice.
- ³ The day of the week will now be flashing. Press UP or DOWN to adjust to the current day of the week and press SET to confirm.

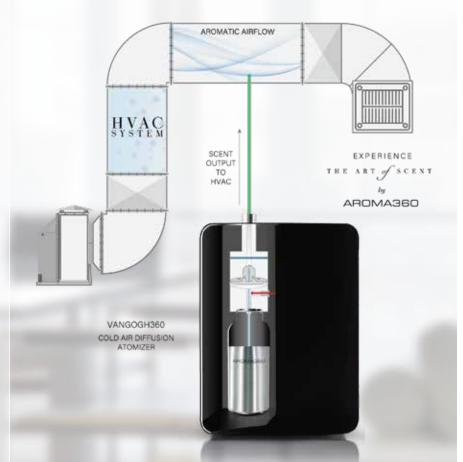

Setting the Operating Hours

Now it's time to set your event operating periods. The VanGogh360 allows up to five individual event operating periods so you can scent at various times on different days of the week.

- 1 To set the start time of an operating period: Press MODE. EVENT 1 ON will appear. This represents the On Time for the first working period. Set time as instructed above.
- 2 To set the operating days: Press UP or DOWN. The days of the week will begin to flash. Select the days you wish to apply the working hours to. Once the desired days have been selected, press SET to confirm.
- 3 To set the end time of the operating period: Press MODE. EVENT 1 OFF will appear. This represents the Off Time for the first operating period. Press UP or DOWN to adjust the hour, press SET to confirm. Repeat to set the minutes.
- 4 Repeat these steps to set Events 2-5, if need be.
 - Ensure there are no conflicting settings.
 - The unit cannot be set to run past midnight. You must split the setting between two different working periods. For example:
 - i. EVENT 1 ON 22:00 EVENT 1 OFF 23:59
 - ii. EVENT 2 ON 00:01 EVENT 2 OFF 04:00

How to Adjust the Scent Intensity

- 1 Press MODE and the display will show SCENT WORK PAUSE. This is where you will adjust the scent intensity for EVENT 1. You can set it between 5% and 95% (with 5% being the lowest setting and 95% being the highest setting). Press SET to confirm the intensity.
- Once you have the desired scent intensity, press MODE and EVENT 2 ON will appear. This will allow you to set the On Time for the second and remaining operating periods. If you only have one operating period, then press MODE until you reach the end of the event settings.

Wall Mounting the VanGogh360

In the wall-mounting kit, you'll find the necessary tools to affix your diffuser to the wall.

- 1 Unscrew the wall-mounting plate from the back of the diffuser.
- 2 Use the wall-mounting plate and a marker to make screw points on the wall. Use the provided green screws in the screw points.
- 3 Latch the wall mounting plate over the screws and use the black screws to affix the plate. With the plate secured, use the hooks on the side of the plate to secure the diffuser. Tighten the screws on the side of the diffuser.