



zogics | FLOORING

1" Tile Rubber Flooring

PRODUCT BROCHURE





Zogics 1" Tile Rubber Flooring

Zogics 1" Rubber Floor Tiles are a premium flooring solution. Provides safety and comfort to your members. Protects equipment and subfloors. Offers quality sound dampening and shock absorption. All Zogics Flooring is made of 100% recycled rubber. Contains low VOCs (that rubber smell) and proudly made in the USA. Our products are GreenCircle certified, helping qualify your facility for LEED credits.



Why Zogics 1" Tiles?

Zogics is your partner for modular rubber floor tiles. We can help you design the perfect space for your needs and your budget. Our experts will walk you through every step, from ideation to design to installation. Let us do the heavy lifting so you can get back to what you do best.



Little to No Odor
(Lowest VOCs)



Quickest Lead
Time & Easiest
Quoting



Full Design Staff
for Layout



Best Acoustic
Sound Dampening



100% Recycled
Rubber




10-Year
100% Warranty

Colors

Add flair by introducing color to your 1" rubber flooring tiles. It allows you to match both your facility's look and design. Our flooring is available with a standard selection of 8 colors and could also include specific coloring. From our economic Jet Black to a cool standout like Blue Summit, choose the right color that will make your members feel at home when working out.

(10% COLOR)

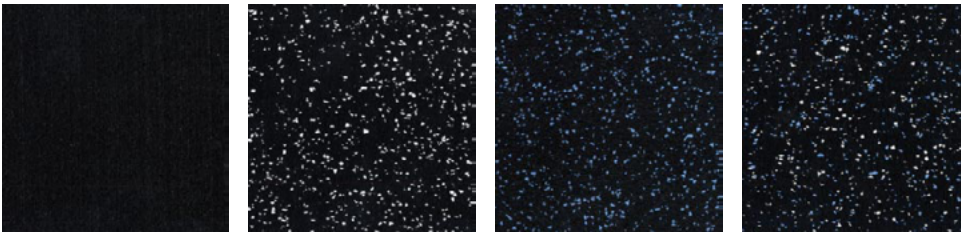


Black Infinity

Gray Galaxy

Blue Dusk


Blue Comet

(35% COLOR)



Blue Blizzard

(95% COLOR)

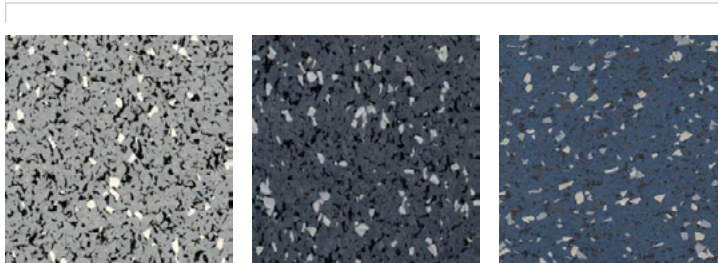

Gray Mountain

Midnight Peak

Blue Summit

Invent Your Own Color

Looking for a fully custom look? No problem! We can combine a variety of vibrant EPDM color granules to create your own flooring color. Contact us for more information. *(minimums apply)*



[Get in touch for full color options.](#)

FEATURES

- Easy Installation, No Adhesive Required
- Portable & Modular Design
- Slip Resistant (wet or dry)
- Noise & Vibration Reduction
- 10-Year Warranty
- Custom Colors Available
- Made in the USA
(minimums apply)

SPECIFICATIONS

- **Thickness:** 1"
 - **Tile Size:** 24" x 24"
 - Beveled Edge
 - Waffle Backing
 - Interlock w/ Dowel Pins (No Adhesive)
- Note: Minimum Order of 100 sq/ft*

MARKET APPLICATIONS

Fitness Flooring
Health Clubs
Indoor Recreation
Locker Rooms
Functional Training
Weight Rooms
Temporary Space
Commercial

PRODUCT PERFORMANCE DATA

Density	ASTM D3676 (Top Layer)	65 – 80 pcf (depends on surface color)
Hardness	ASTM D2240 (Shore A)	65 +/- 5
Tear Strength	ASTM D624	70 pli min
Elongation	ASTM D412	> 150%
Tensile Strength	ASTM D412	> 200 PSI
Resistance to Chemicals	ASTM F925	No Change
Coefficient of Friction	ASTM D2047	> 0.95
Impact Insulation Class (IIC)	E492	> 50
Critical Radiant Flux	ASTM E648	Class II
LEED Qualification	Qualifies for Material & Resources Credit	



zogics

Still have questions?
We love to help!