



zogics | FLOORING

Puzzle Tile Rubber Flooring

PRODUCT BROCHURE





Zogics Puzzle Tile Rubber Flooring

Zogics Puzzle Tiles are a fit for every fitness space. These durable and resilient interlocking rubber floor tiles come in corner, border, and center tiles. Installation is easy. Customize by color, measurements, and marketing such as custom logos. All Zogics Flooring is made of 100% recycled rubber. Contains low VOCs (that rubber smell) and proudly made in the USA. Our products are GreenCircle certified, helping qualify your facility for LEED credits.




Little to No Odor
(Lowest VOCs)



Quickest Lead
Time & Easiest
Quoting



Full Design Staff
for Layout



No Adhesive,
Semi-Permanent



100% Recycled
Rubber




5-Year
100% Warranty

Why Zogics Puzzle Tiles?


Zogics is your partner for interlocking rubber floor tiles. We can help you design the perfect space for your needs and your budget. Our experts will walk you through every step, from ideation to design to installation. Let us do the heavy lifting so you can get back to what you do best.



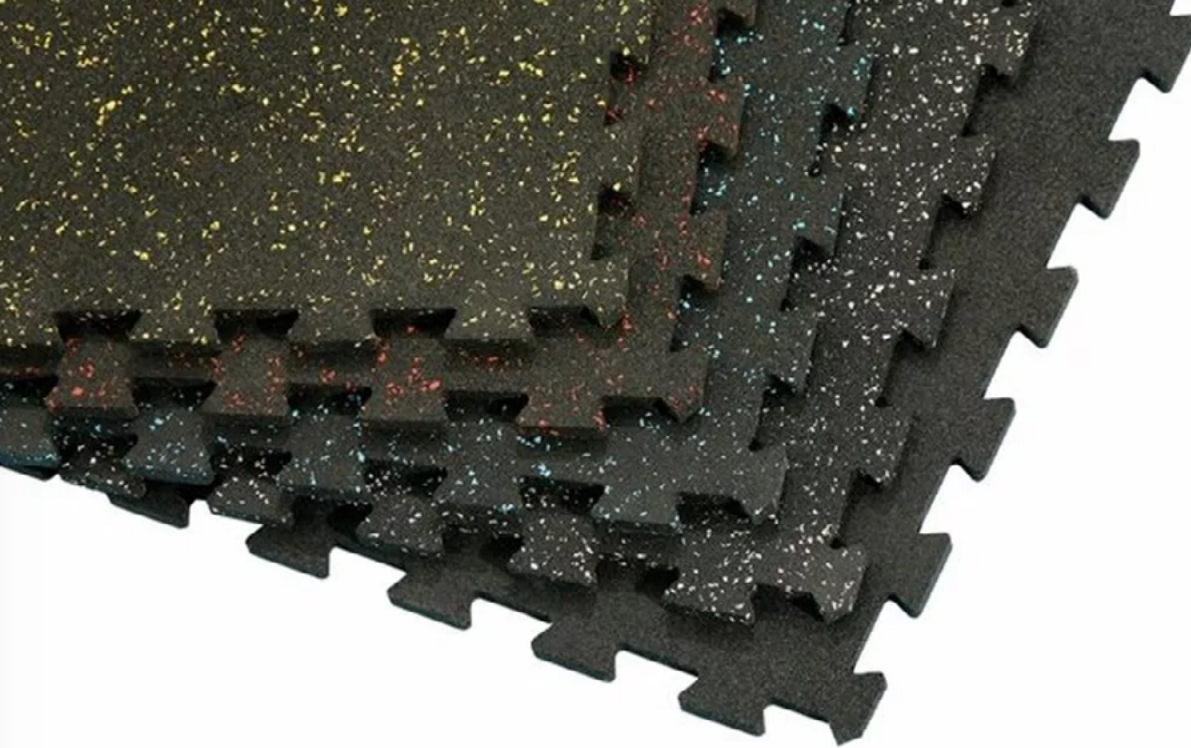


Colors

Your rubber flooring should match your facility's branding and design. Our puzzle tiles are available with a standard selection of 4 colors with additional colors available upon request (minimums apply).



Black Infinity



Gray Galaxy




Blue Dusk



Blue Blizzard

Available Pieces



Zogics Puzzle Tiles can be used to create an entire fitness facility floor with endless creative options. Another option is to use our Puzzle Tiles as an accent treatment or border in combination with our Rolled Rubber Flooring.

FEATURES

- Easy Installation, No Adhesive Required
- Border & Corner Pieces
- Economic Entry & Maintenance Costs
- Slip Resistant (wet or dry)
- Seamless Appearance
- 5-Year Warranty
- Made in the USA
- Custom Colors Available
(minimums apply)

SPECIFICATIONS

- **Thickness:** 9mm (.35")
- **Size:** 24" x 24"
- **Pieces:** Center, Corner, Outside Edge
NOTE: Minimum Order of 100 sq/ft

MARKET APPLICATIONS

Fitness Flooring
Health Clubs
Indoor Recreation
Locker Rooms
Functional Training
Weight Rooms
Temporary Space

PRODUCT PERFORMANCE DATA

Density	ASTM D3676	60 pcf
Hardness	ASTM D2240 (Shore A)	65 +/- 5
Tear Strength	ASTM D624	80 pli min
Elongation	ASTM D412	>145%
Tensile Strength	ASTM D412	>220 PSI
Flexibility	ASTM F137 1/4" Mandrel	Pass
Resistance to Chemicals	ASTM F925	No change
LEED Qualification	Qualifies for Material & Resources Credit	



zogics

Still have questions?
We love to help!