

zogics FLOORING

Rolled Rubber Flooring





PRODUCT BROCHURE



Zogics Rolled Rubber Flooring

Zogics Rolled Rubber Flooring is a best seller for a reason. This dense and resilient flooring allows for maximum comfort and impact absorption. Customize by color, measurements, and marketing such as custom logos.

All Zogics Flooring is made of 100% recycled rubber. Contains low VOCs (that rubber smell) and proudly made in the USA. Our products are GreenCircle certified, helping qualify your facility for LEED credits.



Why Zogics Rubber Flooring?

Zogics is your partner for custom rolled rubber flooring.

We can help you design the custom flooring solution for your needs and your budget. Our experts will walk you through every step, from ideation to design to installation. Each facility receives a custom design. Leave us the heavy lifting so you can get back to what you do best.



Little to No Odor (Lowest VOCs)



Quickest Lead Time & Easiest Quoting



Full Design Staff for Layout




Custom Branding
Available



100% Recycled Bubber




5-Year 100% Warranty

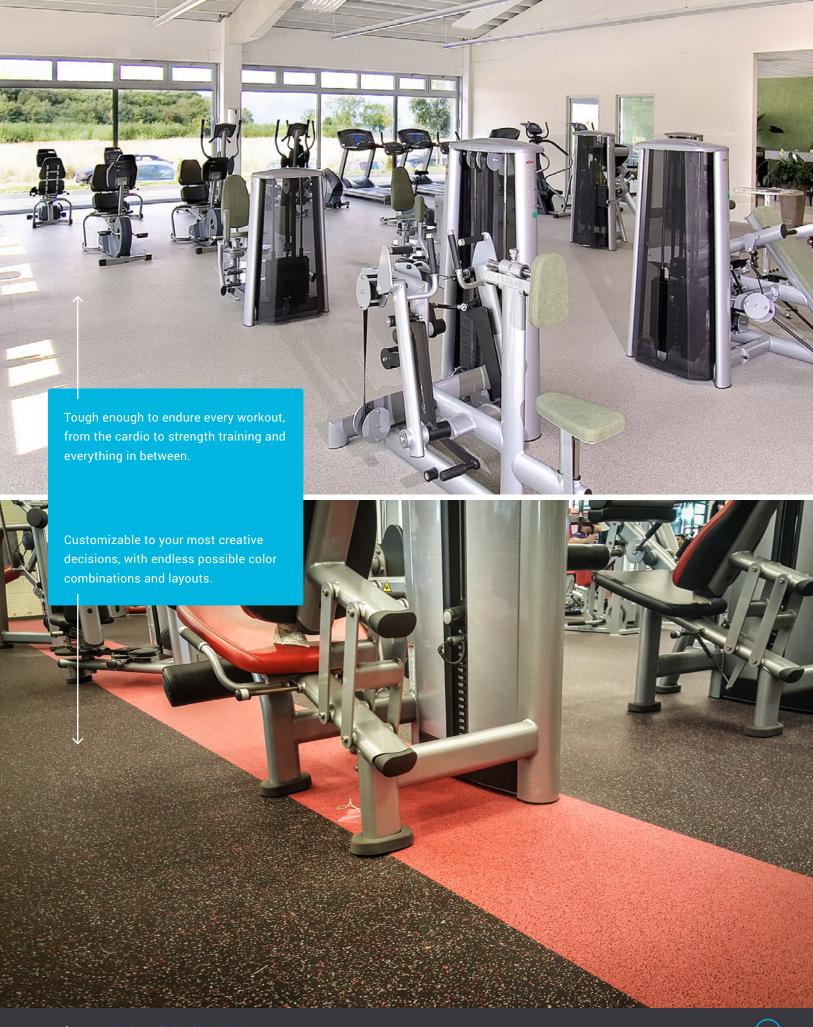

Colors

Your rolled rubber flooring should match your facility's branding and design. Our flooring is available with a standard selection of 13 colors and could also include specific coloring. From our economic Black Infinity to more flair like Green Night, choose the right color that will make your members feel at home.

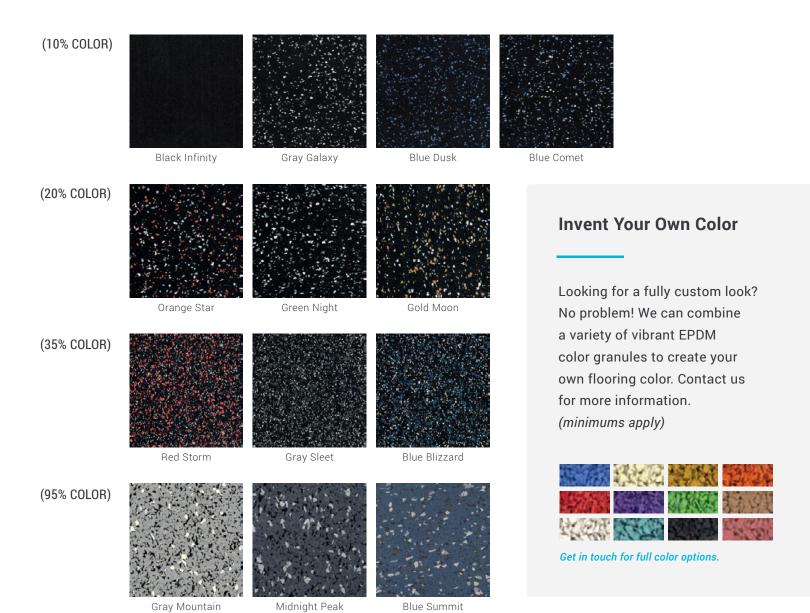









Custom Branding

Using precision water-jet cutting, we make it easy to incorporate your facility logo, branding, or messaging into your flooring. Each logo is manufactured out of the same recycled rubber and is installed to create a seamless surface for your members. Get in touch if you're interested in custom branding your rubber flooring.

FEATURES

- Slip Resistant (wet or dry)
- Economic & Low Maintenance
- Easy Installation
- Seamless Appearance
- 5-Year Warranty
- · Ability to Add Logo or Branding
- · Custom Colors Available
- Made in the USA (minimums apply)

SPECIFICATIONS

• Standard Thickness:

10% Color: 6mm (.23"), 8mm (.31"), 9mm (.35"), 12mm (.47")

20% Color: 9mm (.35"), 12mm (.47")

35% Color: 9mm (.35"), 12mm (.47")

95% Color: 4mm (.15")

• Roll Width: 48"

Roll Length: Standard 25' & 50',
 Custom cut available at no charge
 NOTE: Minimum Order of 100 sq/ft

MARKET APPLICATIONS

Fitness Flooring
Health Clubs
Indoor Recreation
Locker Rooms
Functional Training
Weight Rooms

PRODUCT PERFORMANCE DATA

		(10%, 20%, 35% COLOR)	(95% COLOR)
Density	ASTM D3676	60 pcf	80 pcf
Hardness	ASTM D2240 (Shore A)	60 +/- 5	60 +/- 5
Tear Strength	ASTM D624	80 pli min	70 pli min
Elongation	ASTM D412	>145%	300%
Tensile Strength	ASTM D412	>220 PSI	200 PSI
Flexibility	ASTM F137 1/4" Mandrel	Pass	Pass
Resistance to Chemicals	ASTM F925	No change	No change
LEED Qualification	Qualifies for Material & Resources Credit		







Still have questions?
We love to help!